

EMT-F 20 WH

Membrane spout, flame retardant, TPE, white, M20



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.



Material	TPE, flame-retardant
Temp. range min	-40 °C
Temp. range max	80 °C
Glow wire test	960 °C
Protection class	IP66
Ø Connection thread D	20
Length screw-in thread L	9,5 mm
Ø cable diameter min	1 mm
Ø cable diameter max	13 mm
External diameter ED	25 mm
Total length TL	11 mm
Ø Drilling	20 mm - 21,2 mm
Wall thickness S	2 mm
Product Color	white
Order no. RAL 9001	10063009
Type	EMT-F 20 WH
Packing unit	100
EAN number	4007685630092
Tariff number	39269097
ETIM-Classification	EC000451


12.05.2026

Your Contact:

WISKA India Pvt. Ltd.

Mr. Omkar Ashar · Unit No.247/248,Raheja Tesla Industrial District II , Edison Bldg No.-1A,
Plot No.GEN2/1/C/PART, TTC Industrial Area, MIDC, Juinagar, Navi Mumbai 400705, India

☎ +91-22-4967-1438 · ☎ +91-22-4967-1439 · o.ashar@wiska.in · www.wiska.in

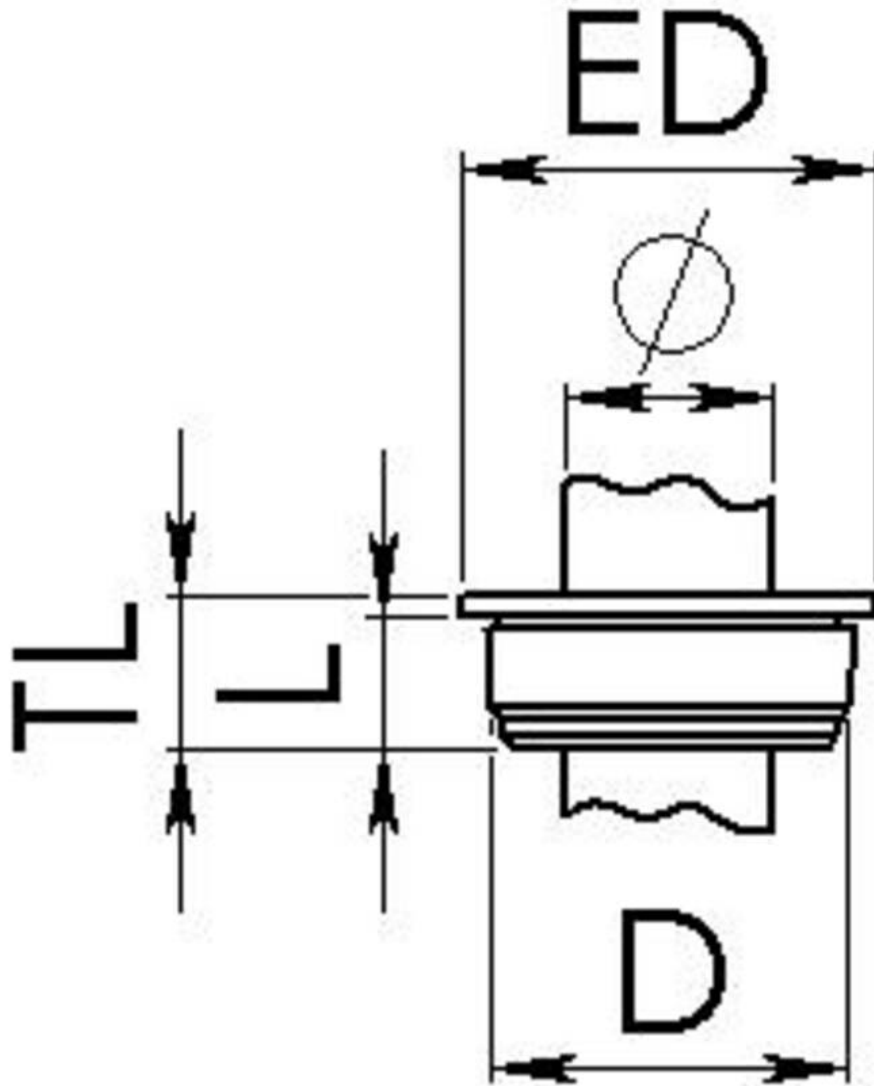

Your Contact:

WISKA India Pvt. Ltd.

Mr. Omkar Ashar · Unit No.247/248,Raheja Tesla Industrial District II , Edison Bldg No.-1A,
Plot No.GEN2/1/C/PART, TTC Industrial Area, MIDC, Juinagar, Navi Mumbai 400705, India

☎ +91-22-4967-1438 · ☎ +91-22-4967-1439 · o.ashar@wiska.in · www.wiska.in