

EMT-F 32 WH

Membrane spout, flame retardant, TPE, white, M32



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.



| | |
|---------------------------------|----------------------|
| Material | TPE, flame-retardant |
| Temp. range min | -40 °C |
| Temp. range max | 80 °C |
| Glow wire test | 960 °C |
| Protection class | IP66 |
| Ø Connection thread D | 32 |
| Length screw-in thread L | 9,5 mm |
| Ø cable diameter min | 1 mm |
| Ø cable diameter max | 25 mm |
| External diameter ED | 37 mm |
| Total length TL | 11 mm |
| Ø Drilling | 30 mm - 31,2 mm |
| Wall thickness S | 2 mm |
| Product Color | white |
| Order no. RAL 9001 | 10063011 |
| Type | EMT-F 32 WH |
| Packing unit | 100 |
| EAN number | 4007685630115 |
| Tariff number | 39269097 |
| ETIM-Classification | EC000451 |


12.05.2026

Your Contact:

WISKA India Pvt. Ltd.

Mr. Omkar Ashar · Unit No.247/248,Raheja Tesla Industrial District II , Edison Bldg No.-1A,
Plot No.GEN2/1/C/PART, TTC Industrial Area, MIDC, Juinagar, Navi Mumbai 400705, India

☎ +91-22-4967-1438 · ☎ +91-22-4967-1439 · o.ashar@wiska.in · www.wiska.in

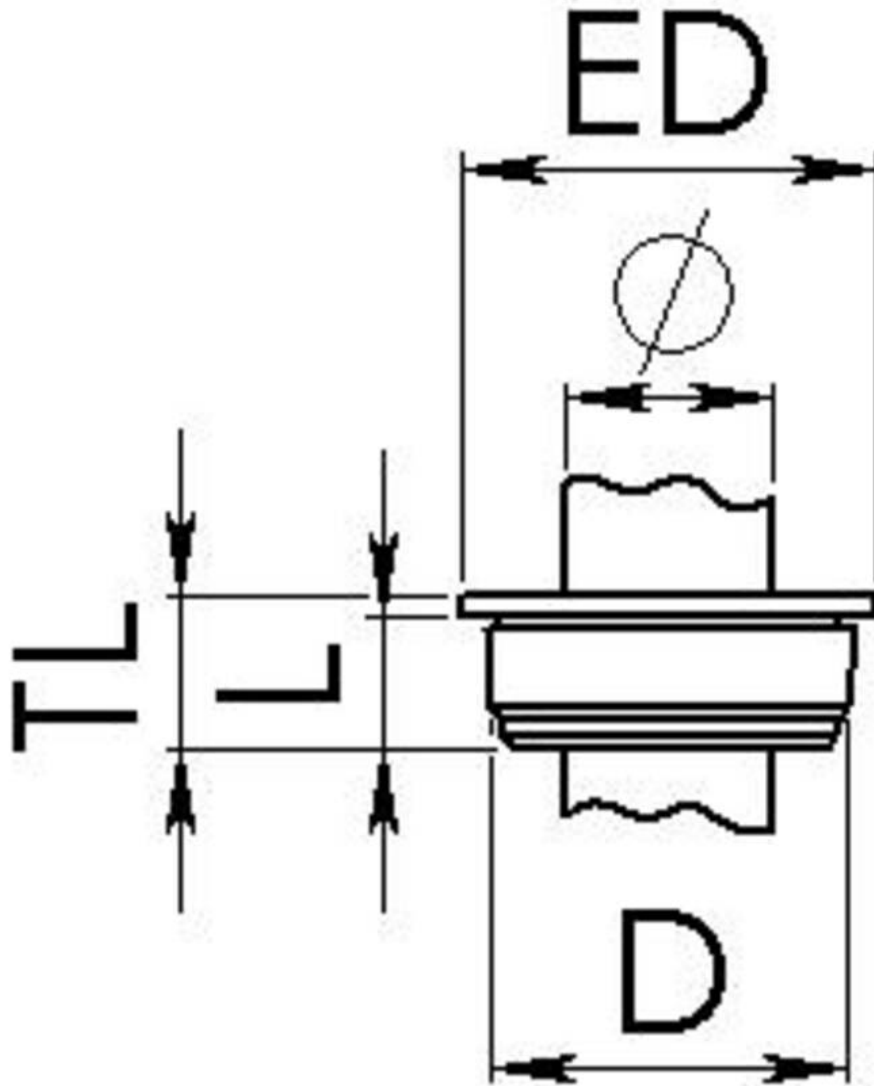

Your Contact:

WISKA India Pvt. Ltd.

Mr. Omkar Ashar · Unit No.247/248,Raheja Tesla Industrial District II , Edison Bldg No.-1A,
Plot No.GEN2/1/C/PART, TTC Industrial Area, MIDC, Juinagar, Navi Mumbai 400705, India

☎ +91-22-4967-1438 · ☎ +91-22-4967-1439 · o.ashar@wiska.in · www.wiska.in